


Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics					
$V_{(BR)DSS}$		30	-	-	V
I_{DSS}		-	-	1.0	μA
I_{GSS}		-	-	± 100	nA
On Characteristics					
$V_{GS(th)}$		1.2	1.7	2.2	V
		-	15.5	20.2	$\text{m}\Omega$
		-	22.1	28.7	$\text{m}\Omega$
Capacitance and Charge					
C_{iss}		-	485	-	pF
C_{oss}		-	69	-	pF
C_{rss}		-	53	-	pF
Q_g		-	10	-	nC
Q_{gs}		-	2	-	nC
Q_{gd}		-	2	-	nC
Timing					
$t_{d(on)}$		-	4.2	-	ns
t_r		-	11	-	ns
$t_{d(off)}$		-	14	-	ns
t_f		-	2	-	ns
Static Characteristics					
I_S		-	-	9	A




Typical Performance Characteristics

Figure 1: Output Characteristics

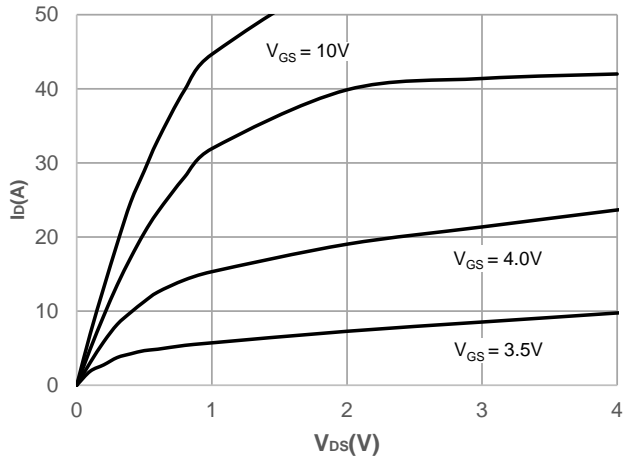

FigFTpFicali ThFist

ics

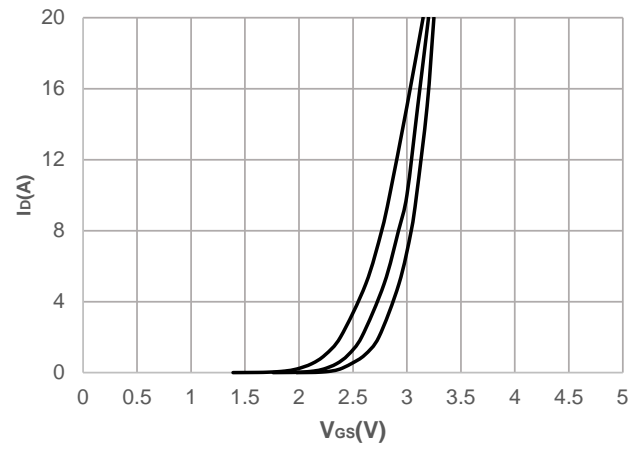

Typical Performance Characteristics

Figure 7: Normalized Breakdown voltage vs. Junction Temperature

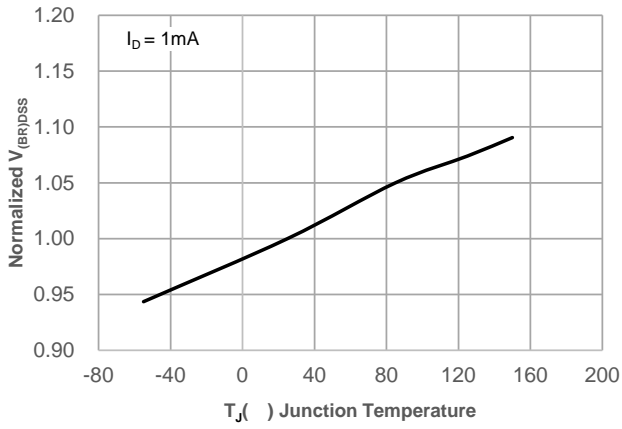


Figure 8: Normalized on Resistance vs. Junction Temperature


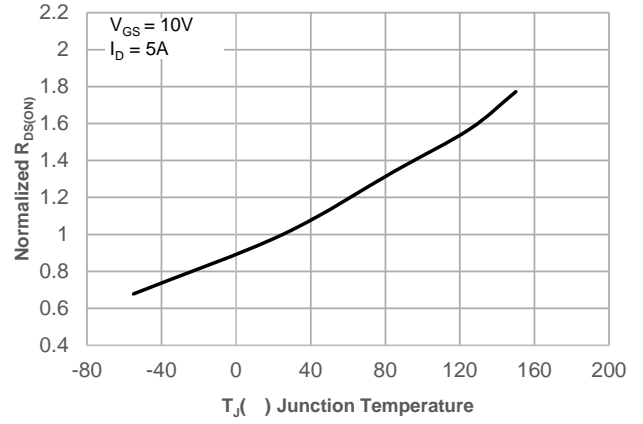


Figure 9: Maximum Safe Operating Area

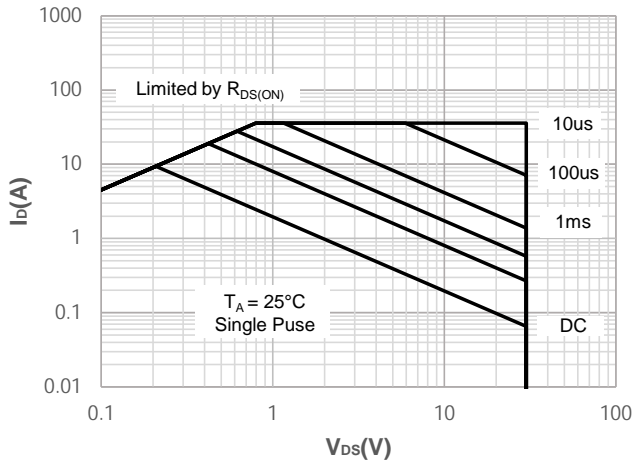

Test Circuit

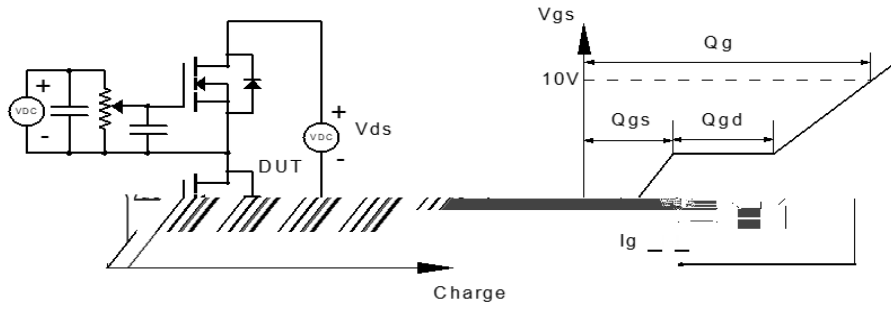


Figure 1: Gate Charge Test Circuit & Waveform

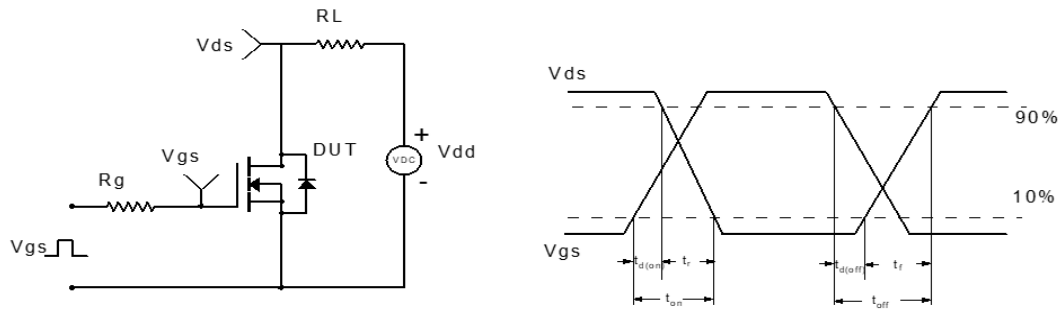


Figure 2: Resistive Switching Test Circuit & Waveform

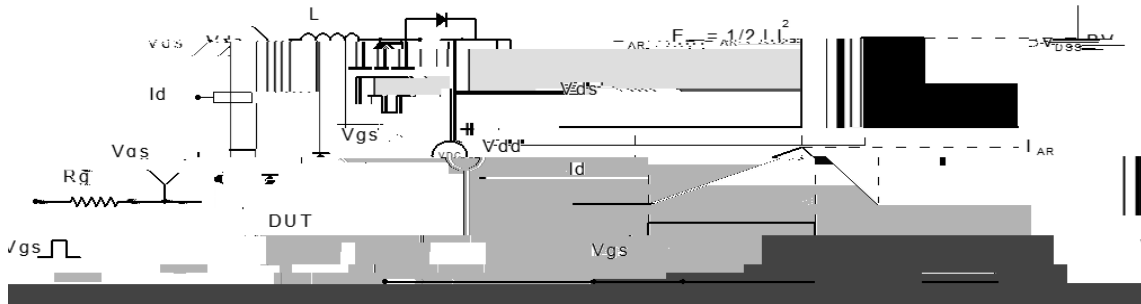


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform

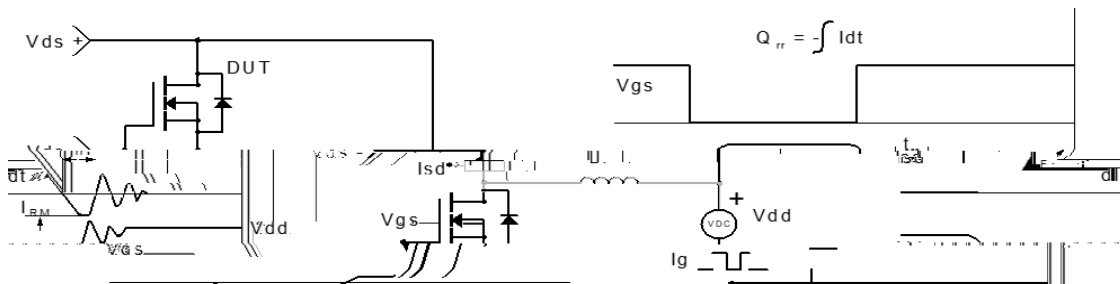


Figure 4: Diode Recovery Test Circuit & Waveform



Package Mechanical Data(SOP-8)

Information furnished in this document is believed to be accurate and reliable.
However, Jiangsu