



0X

M 6

0 A1 .0

DESCRIPTION:

00 X M 6 000

000000

0 0 -9 0000

0 .

Wh 0000 008

M

0000 00

0000 00

00 00 00

00 00

02 5V 0

0

MAIN FEATURES

0 37 0 0

000 -9 00

00 55 -

Z

U

00

00

00

00,AWI

00

00

00

ABSOLUTE MAXIMUM RATINGS

(

00

00



	w_{10}	I_{sc}	(1	A
		T_j	125	
		P_o	250	W
	a 125)	$D/$	(P -3.33	W /
		P_b	350	W
		V_b	350	W
		T_p	-55100	
		T_g	-55150	
		T_b	26 °	

NOTE1AC for 1minute, R.H.=40~60%

NOTE2For 10 seconds

ELECTRICAL CHARACTERISTICS


(

Characteristics Curves

E1: 001

E2: 0 001

001

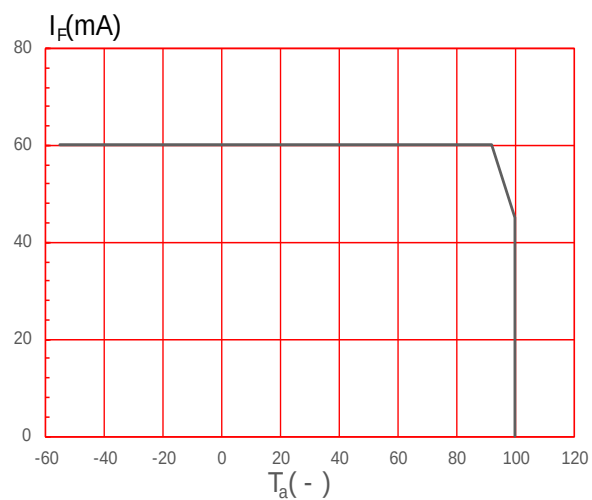

TEST CIRCUITS

Fig 2: 800n

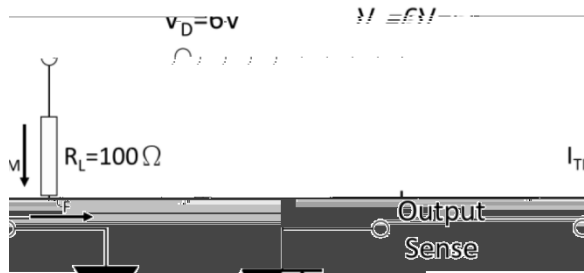


Fig 3: 800n

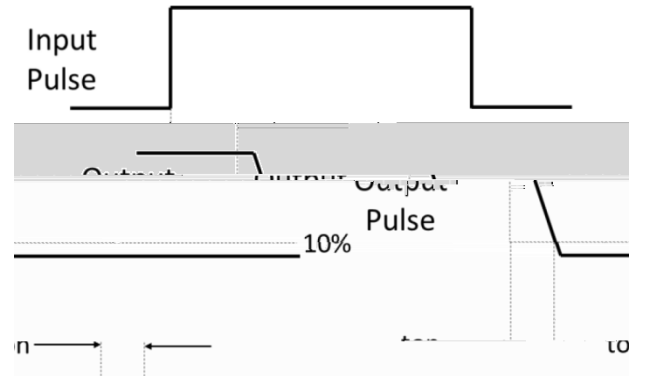


Fig 4:


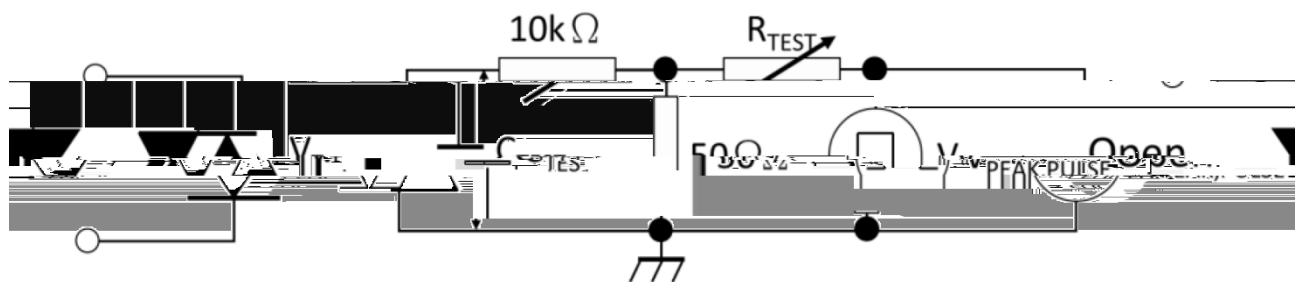


Fig 5:



REFLOW INFORMATION

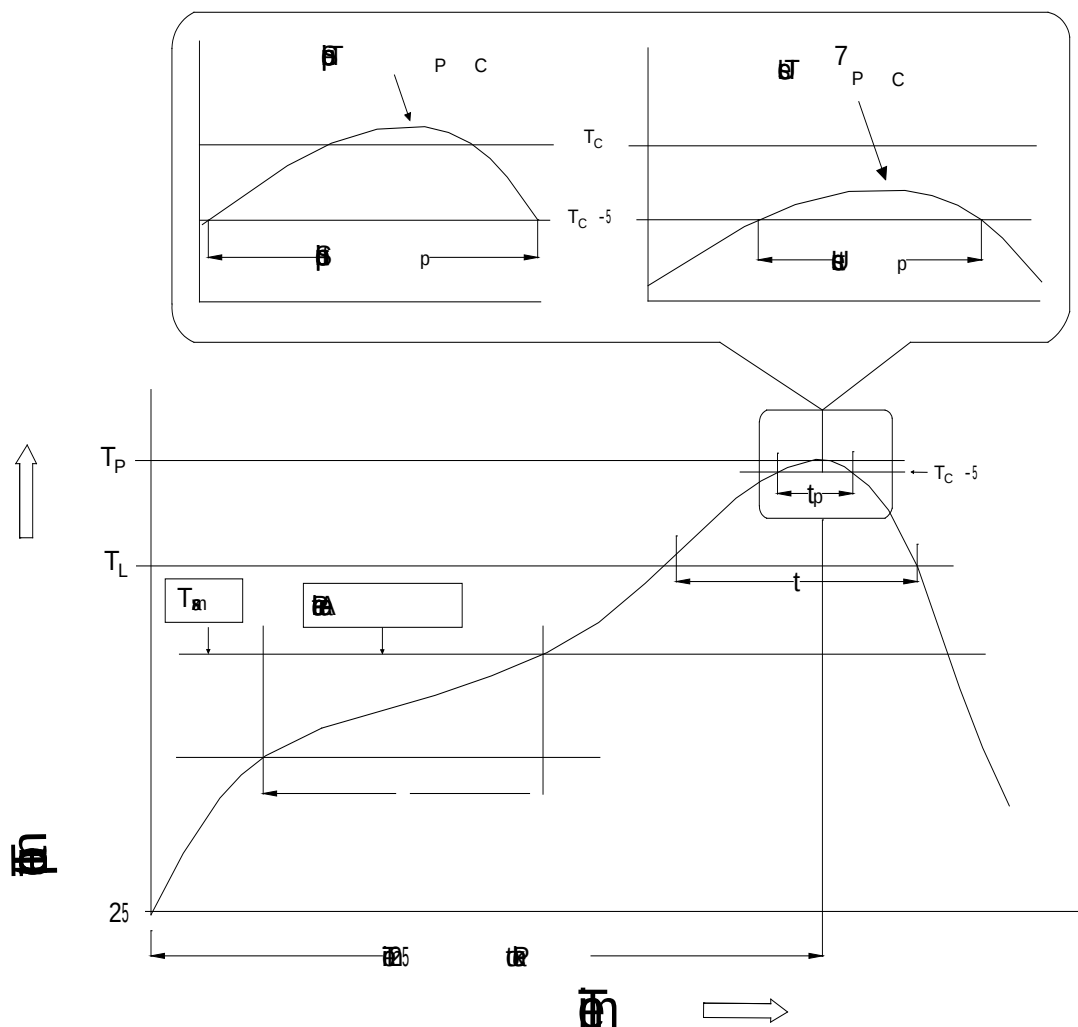

021

ã Jê