



JOCMB35Ck-D8P/S Series


m
A

ORDERING INFORMATION

J	OC	M	B	3	5	C	k	-D8P/S	/
JieJie Microelectronics Co., Ltd.									
Opto Coupler		MOS	B:2NO	3:V _o : 60V		C:I _{FT} 3mA		High speed	P:DIP8 S:SMD8
S:T3 L:T4									
5:I _o :0.18A									

Packing Quantity	
Option	Quantity

MARKING

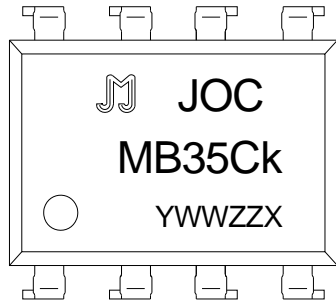

YWWZZX
 └────────── LOT NO.

Characteristics Curves

FIG.1: LED Dropout Voltage vs. Ambient Temperature

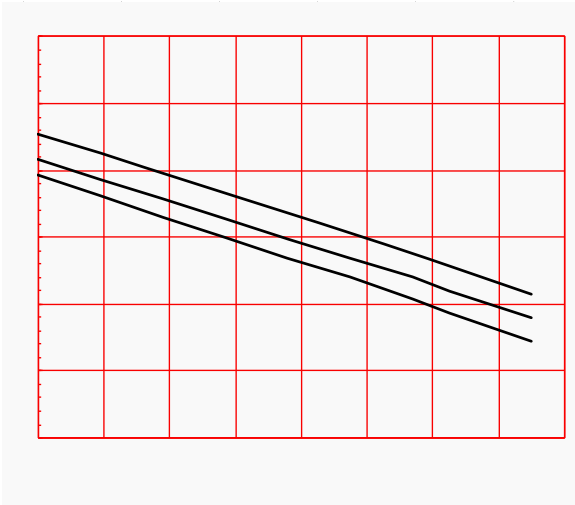



FIG.2: Output Current vs. Output Voltage

FIG.7: Turn On Time vs. Ambient Temperature



FIG.8: Turn Off Time vs. Ambient Temperature

Package Dimension (Unit: mm)


Standard DIP Type:



REFLOW INFORMATION

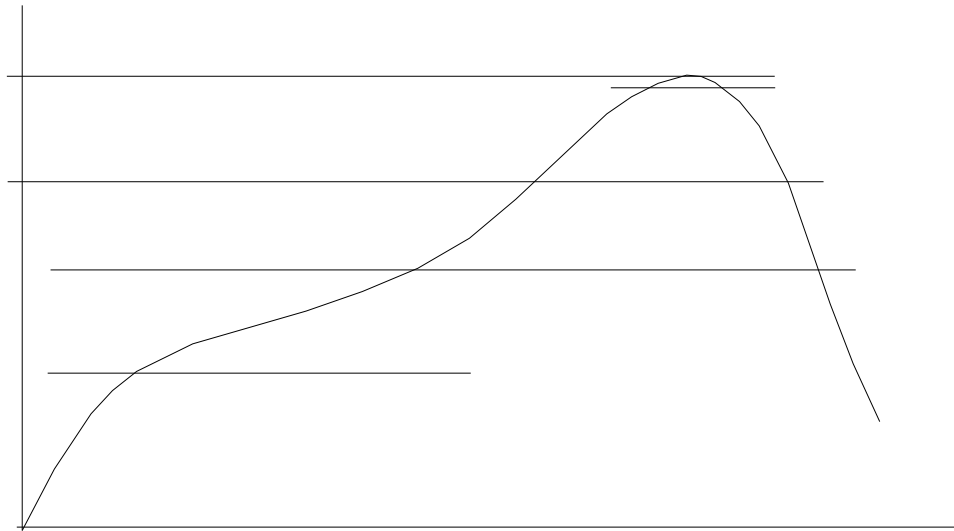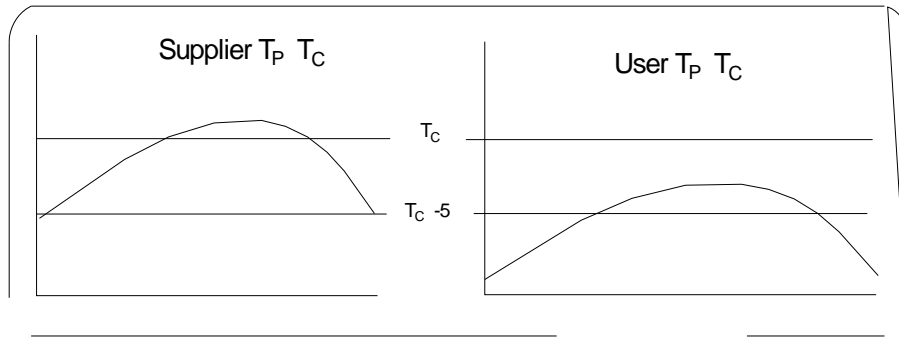

WAVE SOLDERING

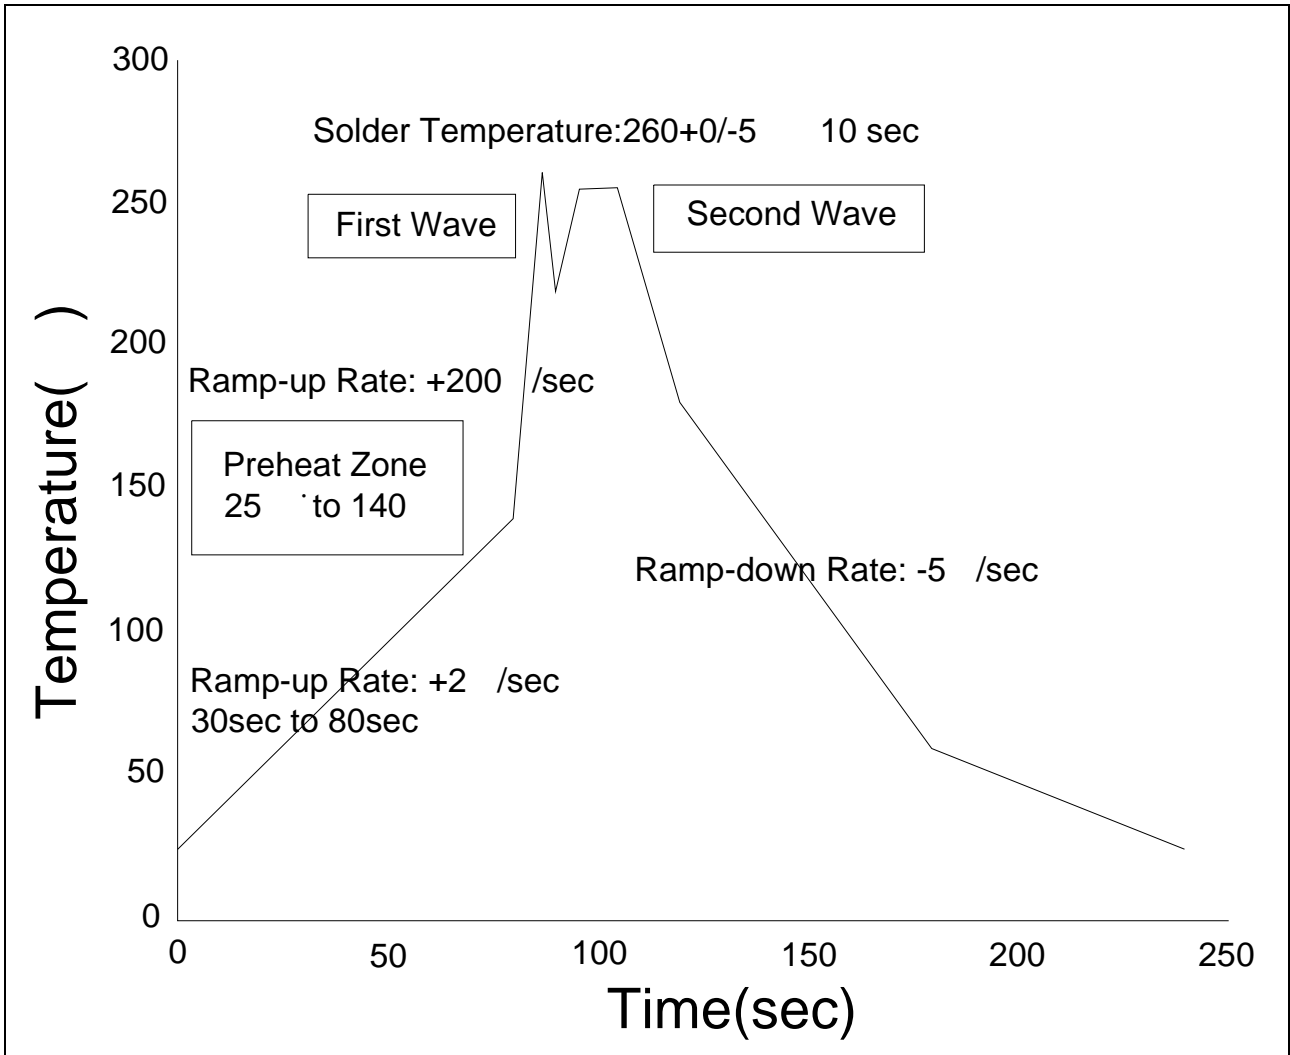

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	360±5
Soldering Time	3s max.

JOCMB35Ck