




| | | | |
|-----------|--|-------------|---|
| | | | |
| V_{CES} | Collector-emitter voltage | 1350 | V |
| V_{GES} | Gate-emitter voltage | ± 20 | V |
| I_C | Continuous collector current ($T_C=25^\circ$) | 50 | A |
| | Continuous collector current ($T_C=100^\circ$) | 25 | A |
| I_{CM} | Pulsed collector current, t_p limited by T_{vjmax} | 100 | A |
| I_F | Diode continuous forward current ($T_C=100^\circ$) | 25 | A |
| I_{FM} | Diode maximum current, t_p limited by T_{vjmax} | 100 | A |
| P_{tot} | Power dissipation ($T_C=25^\circ$) | 283 | W |
| | Power dissipation ($T_C=100^\circ$) | 142 | W |
| T_{vj} | Operating junction temperature range | -40 to +175 | |
| T_{stg} | Storage temperature range | -55 to +150 | |

$R_{th(j-c)}$ Thermal resistance, j

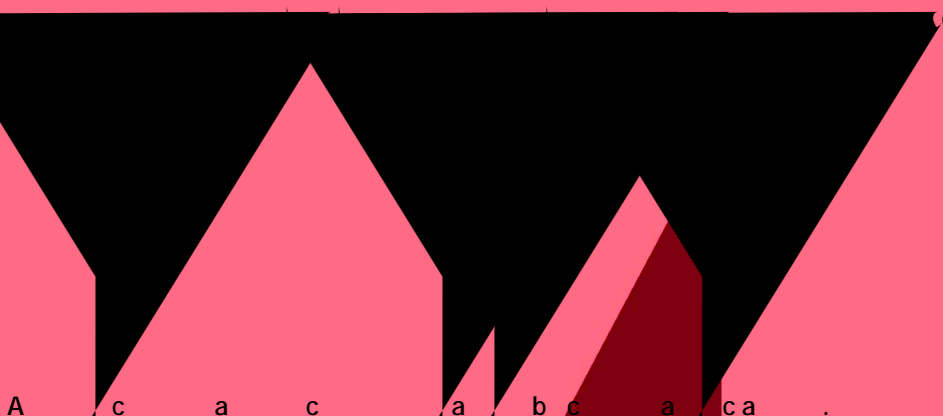

($T_{vj}=25$ unless otherwise specified)

Static characteristics

| BV_{CES} | Collector-emitter breakdown voltage | $V_{GE}=0V, I_C=1mA$ | 1480 | - | - | V |
|---------------|--------------------------------------|-----------------------------------|------|------|------|---------|
| I_{CES} | Collector-emitter leakage current | $V_{CE}=1350V, V_{GE}=0V$ | - | - | 100 | μA |
| I_{GES} | Gate leakage current, forward | $V_{GE}=20V, V_{CE}=0V$ | - | - | 100 | nA |
| | Gate leakage current, reverse | $V_{GE}=-20V, V_{CE}=0V$ | - | - | -100 | nA |
| $V_{GE(th)}$ | Gate-emitter threshold voltage | $V_{GE}=V_{CE}, I_C=1mA$ | 5.0 | 5.4 | 6.0 | V |
| $V_{CE(sat)}$ | Collector-emitter saturation voltage | $V_{GE}=15V, I_C=25A$ | - | 1.65 | - | V |
| | | $V_{GE}=15V, I_C=25A, T_{vj}=175$ | - | 2.05 | - | V |

Dynamic characteristics

| C_{ies} | Input capacitance | $V_{CE}=30V$ $V_{GE}=0V$ $f=1MHz$ | - | 4530 | - | pF |
|-----------|------------------------------|---|---|------|-----|----|
| C_{oes} | Output capacitance | | - | 47 | - | pF |
| C_{res} | Reverse transfer capacitance | | - | 20 | - | pF |
| Q_g | Total gate charge | | $V_{CC}=1080V$ $V_{GE}=15V$ $I_C=25A$ | - | 147 | - |



Switching characteristics

| $t_{d(on)}$ | Turn-on delay time | $V_{CC}=600V$ $V_{GE}=0/15V$ $I_C=25A$ $R_G=10$ Inductive load | - | 37 | - | ns |
|--------------|------------------------|---|---|-----|---|----|
| t_r | Rise time | | - | 29 | - | ns |
| $t_{d(off)}$ | Turn-off delay time | | - | 192 | - | ns |
| t_f | Fall time | | - | 183 | - | ns |
| E_{on} | Turn-on energy | | - | 1.2 | - | mJ |
| E_{off} | Turn-off energy | | - | 1.1 | - | mJ |
| E_{ts} | Total switching energy | | - | 2.3 | - | mJ |
| $t_{d(on)}$ | Turn-on delay time | $V_{CC}=600V$ $V_{GE}=0/15V$ $I_C=25A$ $R_G=10$, $T_{vj}=175$ Inductive load | - | 34 | - | ns |
| t_r | Rise time | | - | 28 | - | ns |
| $t_{d(off)}$ | Turn-off delay time | | - | 203 | - | ns |
| t_f | Fall time | | - | 231 | - | ns |
| E_{on} | Turn-on energy | | - | 1.3 | - | mJ |
| E_{off} | Turn-off energy | | - | 1.6 | - | mJ |
| E_{ts} | Total switching energy | | - | 2.9 | - | mJ |

($T_{vj}=25$ unless otherwise specified)

| | Forward voltage | | - | 1.75 | - | V |
|--|-----------------|---|---|------|---|---|
| | | 5 | - | 1.70 | - | V |

A c a c a b c a ca .

A c a c a b c a ca .

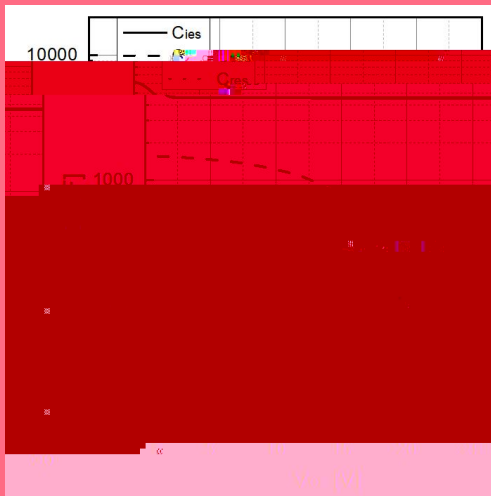


Fig 13. Typical capacitance as a function of V_{CE}
($f=1\text{MHz}$, $V_{GE}=0\text{V}$)

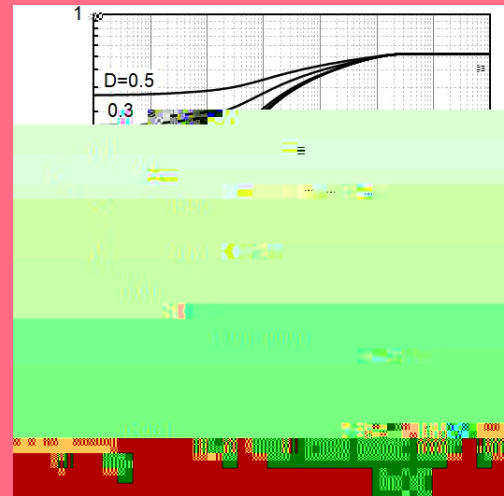


Fig 14. Transient thermal impedance of IGBT

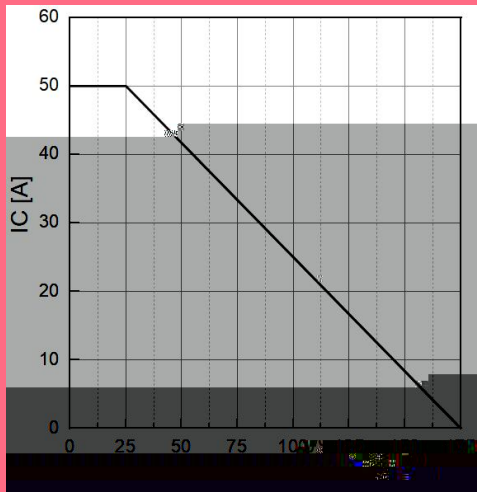


Fig 15. Continuous collector current as a function of T_c
 $T_{vj} = 175$


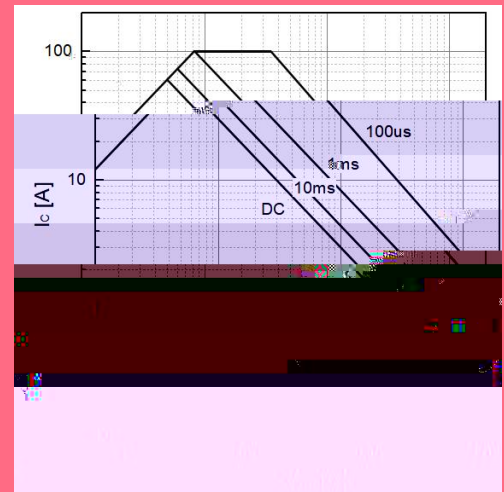


Fig.16 Forward bias safe operating area



Pulsed collector current as a function of T_c
($T_{vj} = 175$, $D=1$, $t_{p1} = 100\mu\text{s}$)

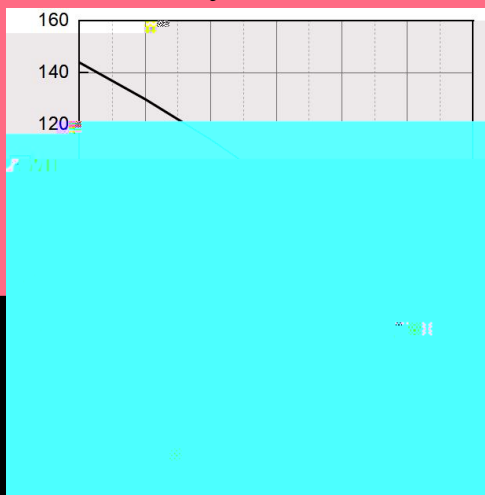

A c a c a b c a ca .

A c a c a b c a ca .