




ACJT105-10V 1A TRIAC

Rev.A.1.1

The ACJT105-10V triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT105-10V embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package SOT-223 is RoHS compliant.



Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	

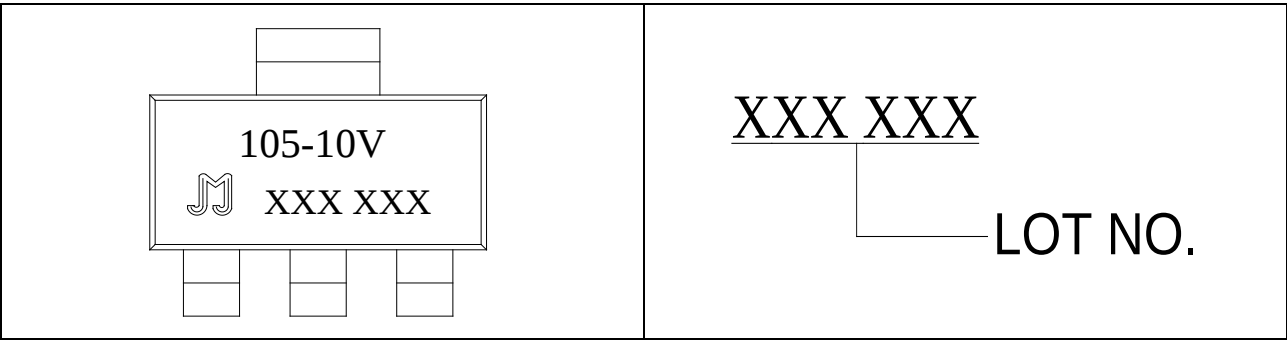
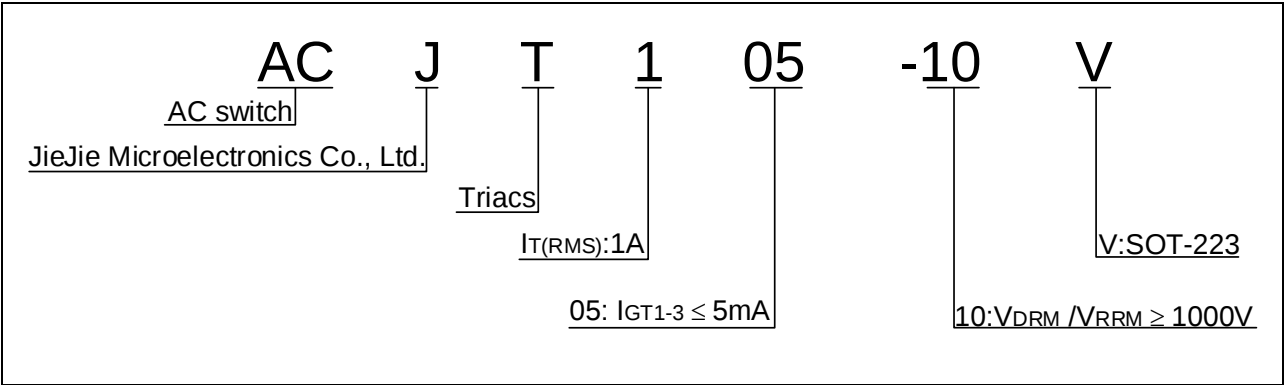


FIG.1: Maximum power dissipation versus RMS on-state current

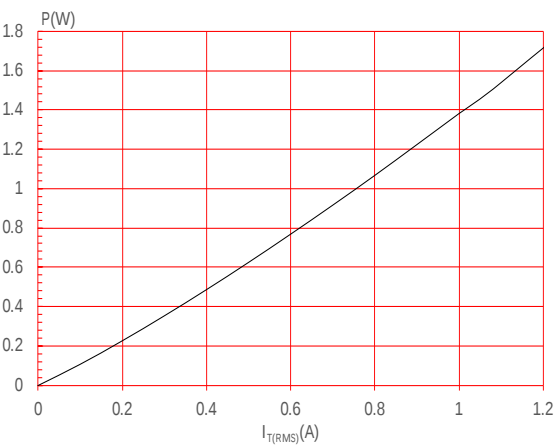


FIG.2: RMS on-state current versus case temperature

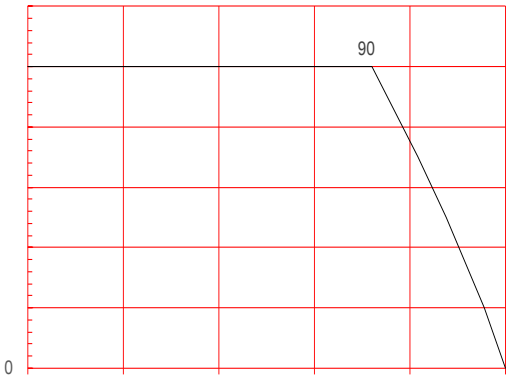


FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature


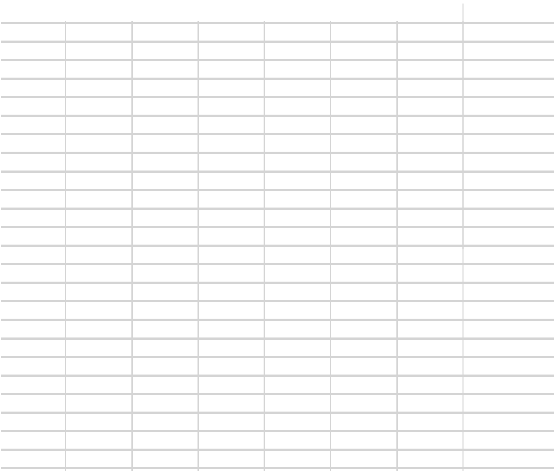


FIG.8 Test circuit for inductive and resistive loads to IEC-61000-4-



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F	4.40			0.173		
F1	2.20			0.087		
G	0.50		1.00	0.020		0.039
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K						

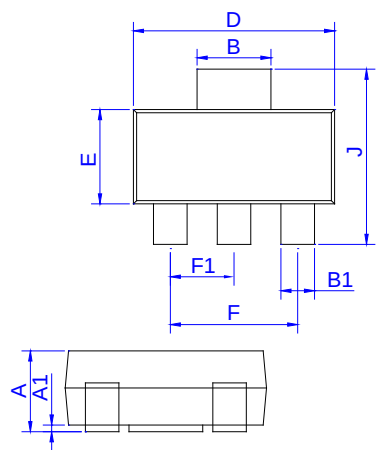

	F	1.65	1.75	1.85	0.065	0.069	0.073
	F	5.45	5.50	5.55	0.215	0.217	0.219
	D0		1.55	1.60		0.061	0.063
	D1		-	-			
	P0	3.90	4.00	4.10	0.154	0.157	0.161
	P1	7.90	8.00	8.10	0.311	0.315	0.319
	P2	1.95	2.00	2.05	0.077	0.079	0.081
	10P0	39.80	40.00	40.20	1.567	1.575	1.583
	A0	6.85	6.95	7.05	0.269	0.273	0.276
	B0	7.15	7.25	7.35	0.280	0.284	0.288
	K0	1.95	2.05	2.15	0.076	0.080	0.084
	T	0.20	0.25	0.30	0.008	0.010	0.012
