


ACJT110-6V 1A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT110-6V triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT110-6V embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package SOT-223 is RoHS compliant.



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Value | |
|--|-----------|---------|---|
| Storage junction temperature range | T_{stg} | -40-150 | |
| Operating junction temperature range | T_j | -40-125 | |
| Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$) | V_{DRM} | 600 | V |
| Repetitive peak reverse voltage ($T_j=25^\circ\text{C}$) | V_{RRM} | 600 | V |

ACJT110-6V

ORDERING INFORMATION 23 0 cm /CS0 CS 0 SCN 0.01 w 1 j 1 J 0 0 m 0 0.217 I -0


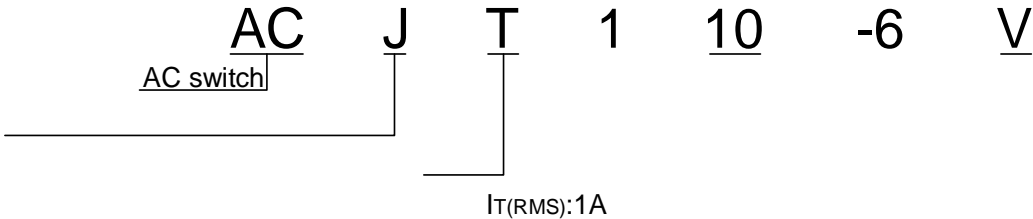


FIG.1: Maximum power dissipat9.0.651S.1799984 303.2399902 795.1199772 cm /lm0 De651I 1 Tf 9oss .R5.11997M

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

E F'gC' t8, P"g ' S

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

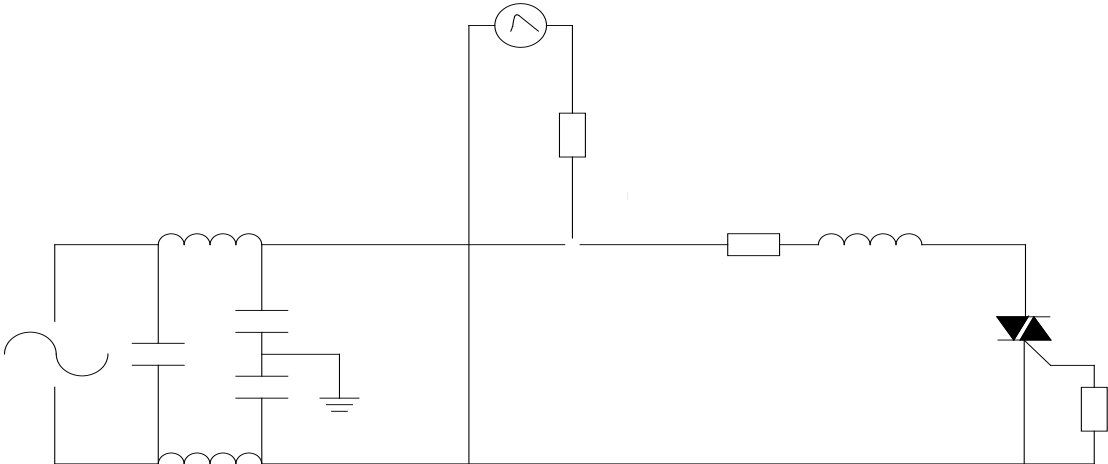


ORDERING INFORMATION

| Order code | Voltage V_{DRM}/V_{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery mode |
|------------|----------------------------------|---------|---------|--------------------|------------------|
| ACJT110-6V | 600 | 10 | SOT-223 | 4,000 | Tape & Reel |

Document Revision History


| Date | Revision | Changes |
|--------------|----------|--------------------------------|
| Apr.13, 2023 | A.1.0 | Last updated |
| Oct.23, 2025 | A.1.1 | Revise PACKAGE MECHANICAL DATA |

PACKAGE MECHANICAL DATA

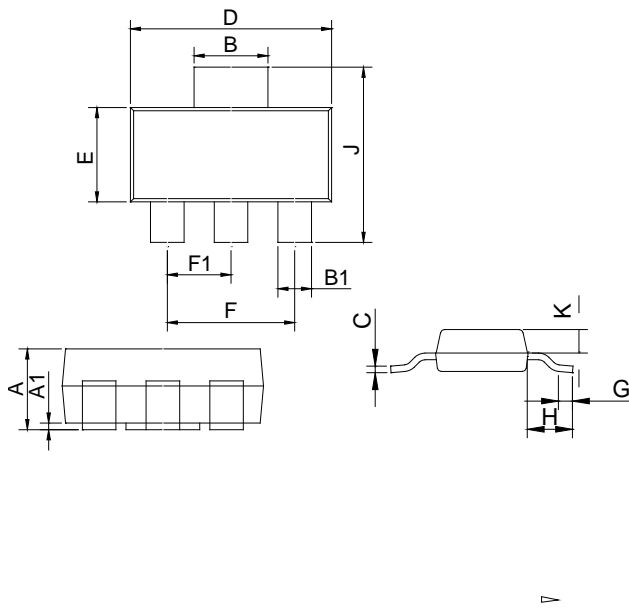

| Ref. | Dimensions | | | | | |
|------|-------------|------|------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 1.50 | 1.60 | 1.80 | 0.059 | 0.063 | 0.071 |
| A1 | 0.01 | 0.06 | 0.10 | 0.001 | 0.002 | 0.004 |
| B | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| B1 | 0.60 | 0.70 | 0.80 | 0.024 | 0.028 | 0.031 |
| C | 0.22 | 0.26 | 0.32 | 0.009 | 0.010 | 0.013 |
| D | 6.30 | 6.50 | 6.70 | 0.248 | 0.256 | 0.264 |
| E | 3.30 | 3.50 | 3.70 | 0.130 | 0.138 | 0.146 |
| F | 4.40 | | 4.80 | 0.173 | | 0.189 |
| F1 | 2.20 | | 2.40 | 0.087 | | 0.094 |
| G | 0.50 | | 1.00 | 0.020 | | 0.039 |
| H | 1.50 | 1.75 | 2.00 | 0.059 | 0.069 | 0.079 |
| J | 6.70 | 7.00 | 7.30 | 0.264 | 0.276 | 0.287 |
| K | 0.80 | | 1.00 | 0.031 | | 0.039 |
| | | | | | | |

DELIVERY MODE

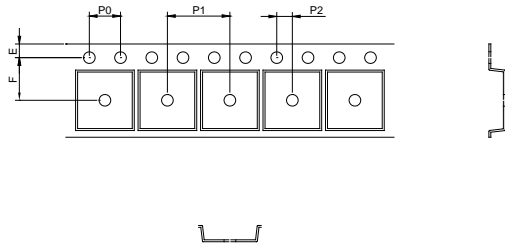

| Ref. | Dimensions | | | | | |
|------|-------------|-------|-------|--------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| W | - | | 12.30 | - | | 0.482 |
| E | 1.65 | 1.75 | 1.85 | 0.065 | 0.069 | 0.073 |
| F | 5.45 | 5.50 | 5.55 | 0.215 | 0.217 | 0.219 |
| D0 | | 1.55 | 1.60 | | 0.061 | 0.063 |
| D1 | | - | - | | | |
| P0 | 3.90 | 4.00 | 4.10 | 0.154 | 0.157 | 0.161 |
| P1 | 7.90 | 8.00 | 8.10 | 0.311 | 0.315 | 0.319 |
| P2 | 1.95 | 2.00 | 2.05 | 0.077 | 0.079 | 0.081 |
| 10P0 | 39.80 | 40.00 | 40.20 | 1.567 | 1.575 | 1.583 |
| A0 | 6.85 | 6.95 | 7.05 | 0.269 | 0.273 | 0.276 |
| B0 | 7.15 | 7.25 | 7.35 | 0.280 | 0.284 | 0.288 |
| K0 | 1.95 | 2.05 | 2.15 | 0.076 | 0.080 | 0.084 |
| T | 0.20 | 0.25 | 0.30 | 0.008 | 0.010 | 0.012 |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.