




ACJT625-8K 6A TRIAC

Rev.A.1.1

DESCRIPTION:

The ACJT625-8K triac is suitable for general purpose
AC sw

itching. It can be used as an ON/OFF func

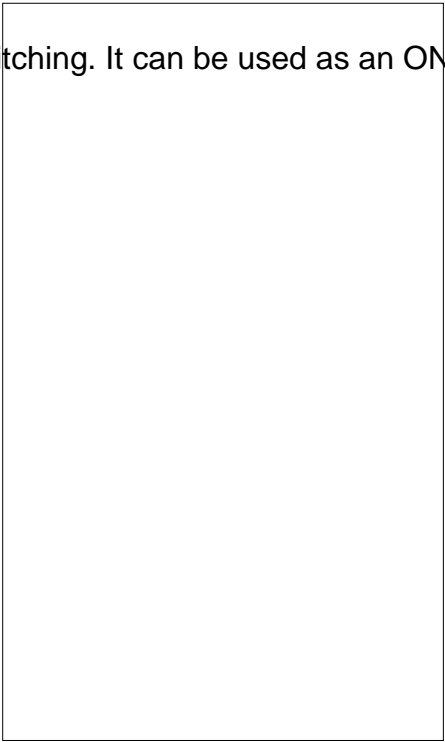



Peak pulse v ($T_j=25$; non-repetitiv -state;FIG.8)	V_{pp}	3.5	kV
--	----------	-----	----

ELECTRICAL CHARACTERISTICS ($T_j=25$ unless otherw

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	$V_D=12V R_L=33$	- -	MAX.	25	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	$V_D=V_{DRM} T_j=125$ $R_L=3.3k$	- -	MIN.	0.2	V

FIG.7: Relativ gate trigger current, holding curreiod latching curreiov junction temperature

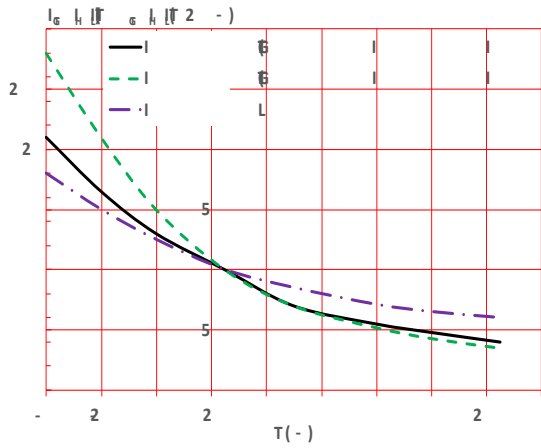



ACJT625-8K-


800

25


10-252

|


PACKAGE MECHANICAL DATA



DELIVERY MODE



Information furnished in this document is believed to be accurate and reliable. Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information. The information in this document is subject to change without notice. If you have signed, Jiangsu JieJie complies with the agreement. Products and information provided are for reference only. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.
Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.