



## JCT840CH 40A SCR

Rev.A.1.1

### DESCRIPTION:

With high ability to withstand the shock loading of large current, JCT840CH SCR provides high  $dV/dt$  rate with strong resistance to electromagnetic interference. It is especially recommended for use on solid state relay, motorcycle, power charger, T-tools etc. Package TQ220C is RoHS compliant.


### MAIN FEATURES

### ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value
Storage junction temperature range	$T_{stg}$	-40-150
Operating junction temperature range	$T_j$	-40-150
Repetitive peak off-state voltage ( $T_j=25^\circ C$ )	$V_{DRM}$	800
Repetitive peak reverse voltage ( $T_j=25^\circ C$ )	$V_{RRM}$	800
Average on-state current ( $T=134^\circ C$ )	$I_{T(AV)}$	25
RMS on-state current ( $T=134^\circ C$ )	$I_{T(RMS)}$	40
Non repetitive surge peak on-state current ( $t_p=10ms, T_j=25^\circ C$ )	$I_{TSM}$	500
Non repetitive surge peak on-state current ( $t_p=8.3ms, T_j=25^\circ C$ )		540
$I^2t$ value for fusing ( $t_p=10ms, T_j=25^\circ C$ )	$I^2t$	1250
Critical rate of rise of on-state current ( $I_G=2 \times I_{GT}, f=100Hz, T_j=150^\circ C$ )	$di/dt$	100
Peak gate current ( $t_p=20\mu s, T_j=150^\circ C$ )	$I_{GM}$	10
Average gate power dissipation ( $T_j=150^\circ C$ )	$P_{G(AV)}$	1




**ORDERING INFORMATION**

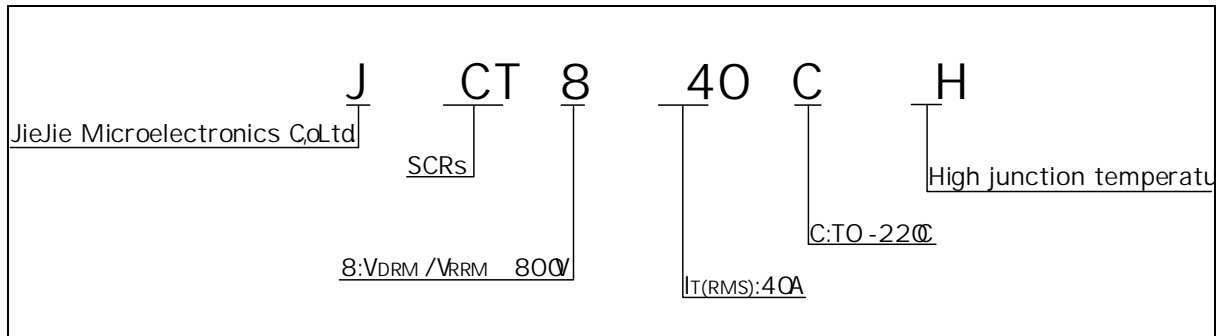

**MARKING**

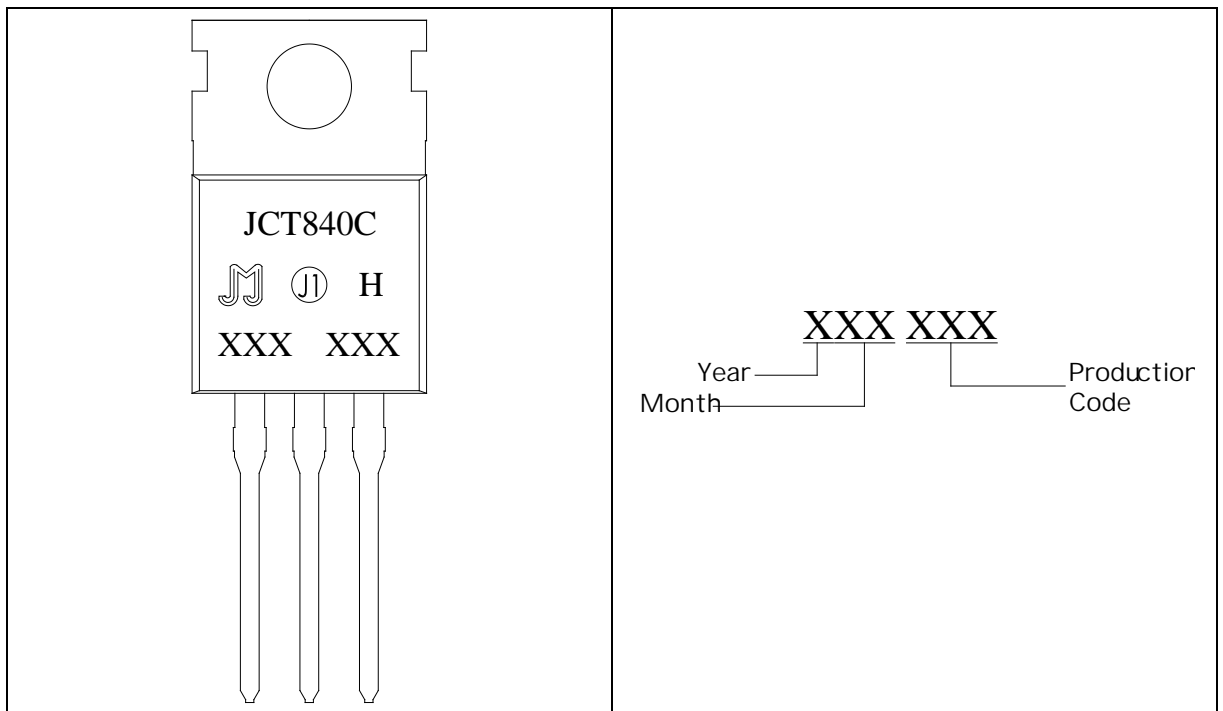

**FIG.1:** Maximum power dissipation versus RMS on-state current

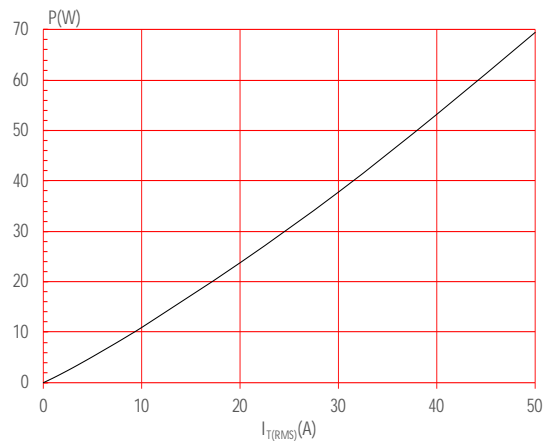

**FIG.2:** RMS on-state current versus case temperature

