



T0420H-8K 4A TRIAC

Rev.A.1.1

## DESCRIPTION:

The T0420H-8K triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Compared to traditional triacs, T0420H-8K provides a very high switching capability up to junction temperatures of 150°C. Package TO-252 is RoHS compliant.

## MAIN FEATURES

## ABSOLUTE MAXIMUM RATINGS

| Parameter                                      | Symbol    | Value   | Unit |
|--|-----------|---------|------|
| Storage junction temperature range             | $T_{stg}$ | -40-150 |      |
| Operating junction temperature range           | $T_j$     | -40-150 |      |
| Repetitive peak off-state voltage ( $T_j=25$ ) | $V_{DRM}$ |         |      |

|  |          |   |    |
|--|----------|---|----|
| Peak pulse voltage<br>( $T_j=25$ ; non-repetitive, off-state; FIG.8) | $V_{pp}$ | 4 | kV |
|--|----------|---|----|

### ELECTRICAL CHARACTERISTICS (unless otherwise specified)

| Symbol      | Test Condition                                | Quadrant | Value |     | Unit |
|-------------|---|----------|-------|-----|------|
| $I_{GT}$    | $V_D=12V$ $R_L=33$                            | - -      | MAX.  | 20  | mA   |
| $V_{GT}$    |   | - -      | MAX.  | 1   | V    |
| $V_{GD}$    | $V_D=V_{DRM}$ $T_j=150$<br>$R_L=3.3k$         | - -      | MIN.  | 0.2 | V    |
| $I_L$       | $I_G=1.2I_{GT}$                               | -        | MAX.  | 30  | mA   |
|             |   |          |       | 40  |      |
| $I_H$       | $I_T=100mA$                                   |          | MAX.  | 25  | mA   |
| $dV/dt$     | $V_D=540V$ Gate Open $T_j=150$                |          | MIN.  | 800 | V/s  |
| $(dI/dt)_c$ | $V_D=150V$ $T_j=150$                          |          | MIN.  | 5   | A/ms |
| $t_{on}$    | $I_G=40mA$ $I_A=200mA$ $I_R=20mA$<br>$T_j=25$ |          | TYP.  | 3   | s    |
| $t_{off}$   |   |          |       | 30  |      |

### STATIC CHARACTERISTICS

| Symbol   | Parameter                 |           | Value(MAX.) | Unit |
|----------|---------------------------|-----------|-------------|------|
| $V_{TM}$ | $I_{TM}=5.5A$ $t_p=380$ s | $T_j=25$  | 1.4         | V    |
| $V_{TO}$ | Threshold voltage         | $T_j=150$ | 0.6         | V    |
| $r_{D}$  | Dynamic resistance        | $T_j=150$ | 129         | P    |

$I_{DRM}$

$$V_D=V_{DRM}$$

ORDERING INFORMATION

FIG.1: Maximum power dissipation versus RMS on-state current

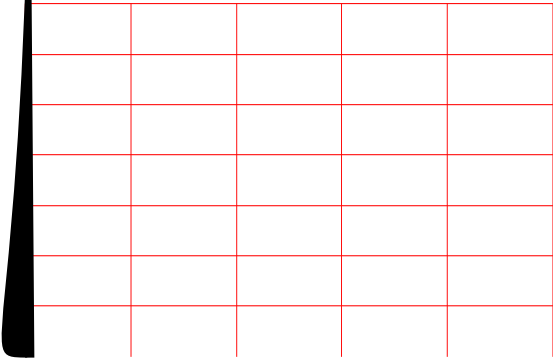
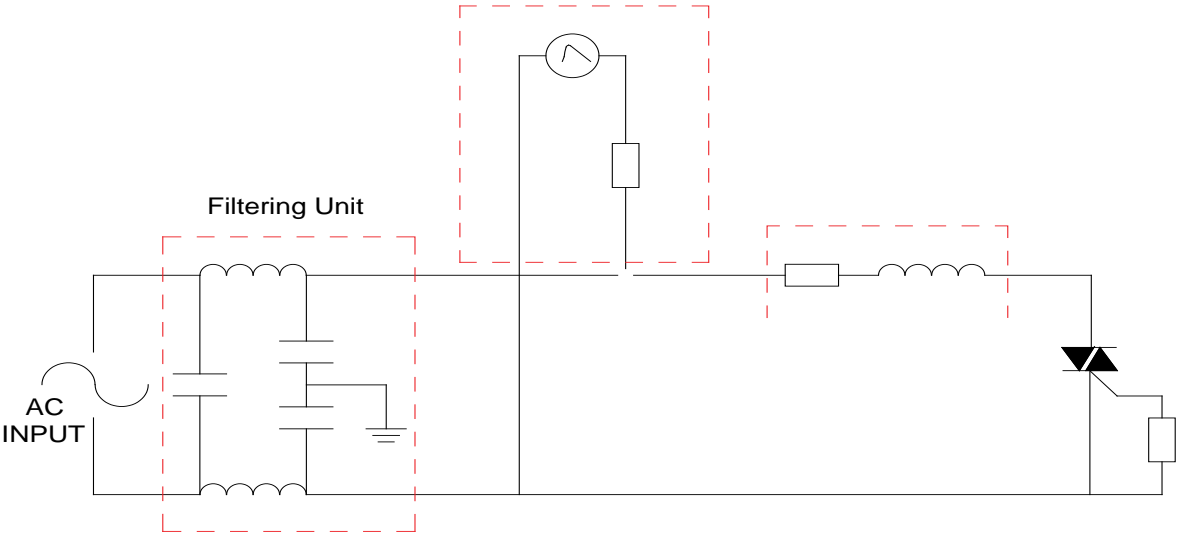


FIG.2: RMS on-state current versus case temperature

FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

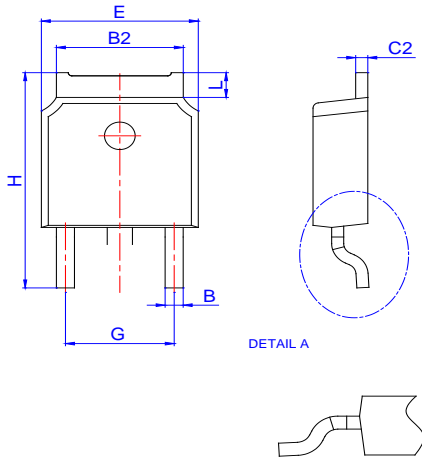


FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards





PACKAGE MECHANICAL DATA



| Ref. | Dimensions  |      |      |        |      |       |
|------|-------------|------|------|--------|------|-------|
|      | Millimeters |      |      | Inches |      |       |
|      | Min.        | Typ. | Max. | Min.   | Typ. | Max.  |
| A    | 2.10        |      | 2.50 | 0.083  |      | 0.098 |
| A2   | 0           |      | 0.15 | 0      |      | 0.006 |
| B    | 0.66        |      | 0.86 | 0.026  |      | 0.034 |
| B2   | 5.18        |      | 5.48 | 0.202  |      | 0.216 |
| C    | 0.40        |      | 0.60 | 0.016  |      | 0.024 |
| C2   | 0.44        |      | 0.58 | 0.017  |      | 0.023 |
| D    | 5.90        |      | 6.30 | 0.232  |      | 0.248 |
| D1   |             |      |      |        |      |       |
| E    | 6.40        |      | 6.80 | 0.252  |      | 0.268 |
| E1   | 4.63        |      |      | 0.182  |      |       |
| G    | 4.47        |      | 4.67 | 0.176  |      | 0.184 |
| G1   | 2.18        |      | 2.38 | 0.086  |      | 0.094 |
| L    | 1.09        |      | 1.21 | 0.043  |      | 0.048 |
| L2   | 1.35        |      | 1.65 | 0.053  |      | 0.065 |
|      |             |      |      |        |      |       |



T0420H-8K

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.