



JST06K-800TW 6A TRIAC

Rev.A.1.1

## DESCRIPTION:

The JST06K-800TW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST06K-800TW snubberless triac is especially recommended for use on inductive loads. It can be driven directly through the MCU I/O port. Package TO-252 is RoHS compliant.

## MAIN FEATURES

## ABSOLUTE MAXIMUM RATINGS

UnV 48 -0 T

Parameter

Symbol

Value


Unit







FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

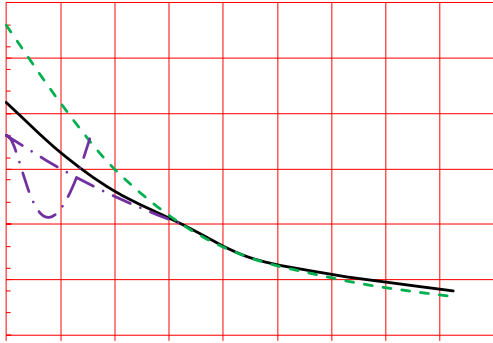




## ORDERING INFORMATION

| Order code      | Voltage<br>$V_{DRM}/V_{RRM}$ (V) | IGT(mA) | Package | Base qty.<br>(pcs) | Delivery mode |
|-----------------|----------------------------------|---------|---------|--------------------|---------------|
|                 |                                  | - -     |         |                    |               |
| JST06K-800TW    | 800                              | 5       | TO-252  | 80                 | Tube          |
| JST06K-800TW-TR |                                  |         |         | 2,500              | Tape & Reel   |


## Document Revision History

| Date         | Revision | Changes                        |
|--------------|----------|--------------------------------|
| Apr.11, 2023 | A.1.0    | Last updated                   |
| Oct.22, 2025 | A.1.1    | Revise PACKAGE MECHANICAL DATA |

PACKAGE MECHANICAL DATA

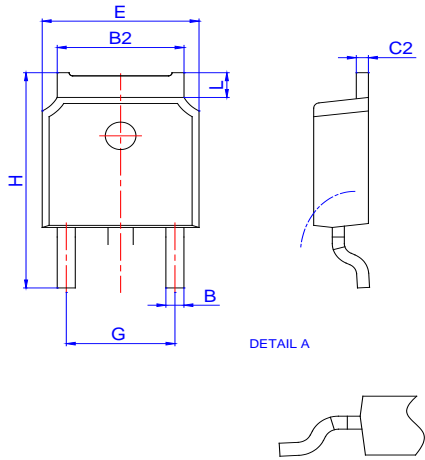

| Ref. | Dimensions  |      |      |        |      |       |
|------|-------------|------|------|--------|------|-------|
|      | Millimeters |      |      | Inches |      |       |
|      | Min.        | Typ. | Max. | Min.   | Typ. | Max.  |
| A    | 2.10        |      | 2.50 | 0.083  |      | 0.098 |
| A2   | 0           |      | 0.15 | 0      |      | 0.006 |
| B    | 0.66        |      | 0.86 | 0.026  |      | 0.034 |
| B2   | 5.18        |      | 5.48 | 0.202  |      | 0.216 |
| C    | 0.40        |      | 0.60 | 0.016  |      | 0.024 |
| C2   | 0.44        |      | 0.58 | 0.017  |      | 0.023 |
| D    | 5.90        |      | 6.30 | 0.232  |      | 0.248 |
| D1   |             |      |      |        |      |       |
| E    | 6.40        |      | 6.80 | 0.252  |      | 0.268 |
| E1   | 4.63        |      |      | 0.182  |      |       |
| G    | 4.47        |      | 4.67 | 0.176  |      | 0.184 |
| G1   | 2.18        |      | 2.38 | 0.086  |      | 0.094 |
|      |             |      |      |        |      |       |
| L    | 1.09        |      | 1.21 | 0.043  |      | 0.048 |
| L2   | 1.35        |      | 1.65 | 0.053  |      | 0.065 |
|      |             |      |      |        |      |       |





Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.