



JST20C-1200CW 20A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST20C-1200CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST20C-1200CW snubberless triac is especially recommended for use on inductive loads. From T2 terminals to external heatsink. Package TO-220C is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	
Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$)	V_{DRM}	1200	V
Repetitive peak reverse voltage ($T_j=25^\circ\text{C}$)	V_{RRM}	1200	V
RMS on-state current ($T_c=98^\circ\text{C}$)	$I_{T(RMS)}$	20	A

Non repetitive surge peak on-state current

ORDERING INFORMATION

J	ST	20	C	-1200	CW
JieJie Microelectronics Co., Ltd.	Triacs	$I_{T(RMS)}:20A$	C:TO-220C	1200:VDRM /VRRM 1200V	CW:IGT1-3 35mA

MARKING

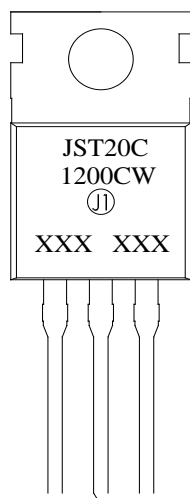

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST20C-1200CW	1200	35	TO-220C	50	Tube

Document Revision History

Date	Revision	Changes	99.10.562 8 35.6255299..
Apr.12, 2023	A		

