



JST41SJ-600BW 40A TRIAC

Rev.A.2.1

DESCRIPTION:

The JST41SJ600 fac i B W

A C

aplication s

s

d 41SJ-600 W B

im

fac i

s

s


in -247J i d ctvla

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage temperature	T	-40-150	

ORDERING INFORMATION

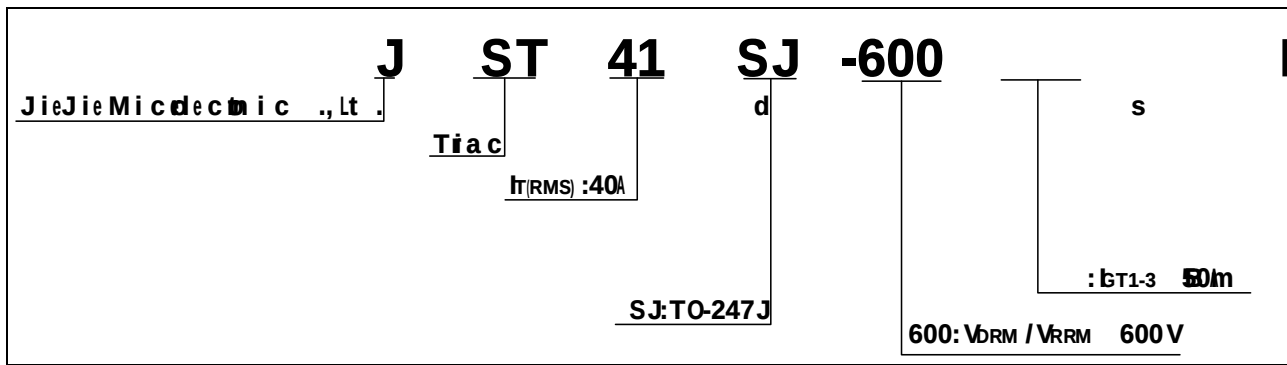

MARKING

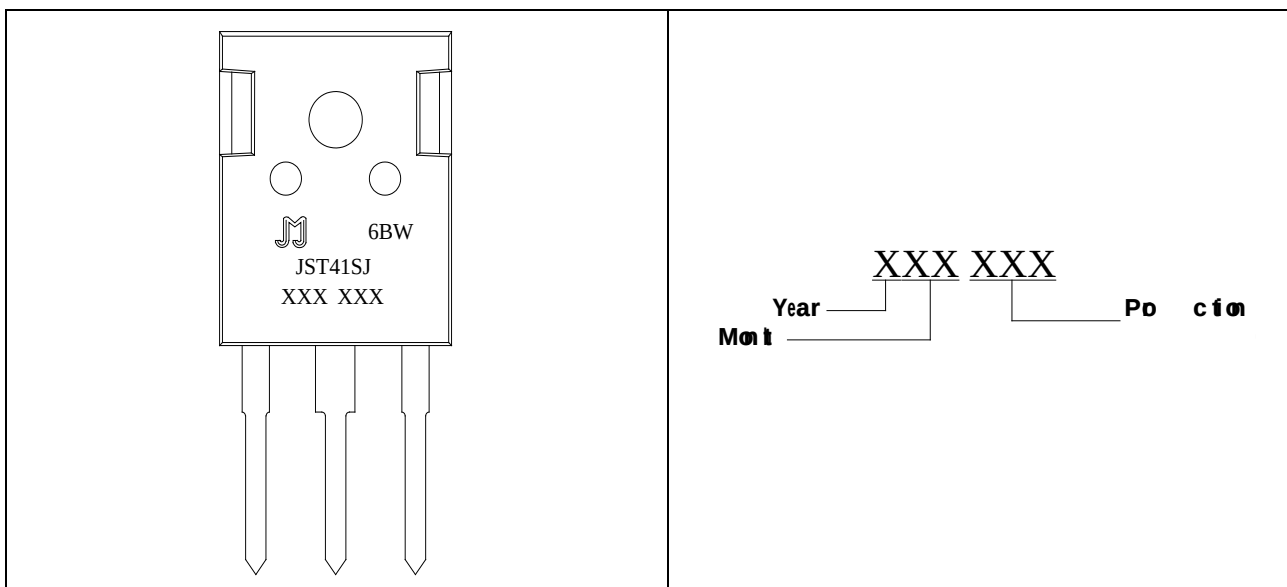


FIG.1: Max
-


d

FIG.2: RMS - i
tent s

FIG.7 Test

-61000-4-5

s

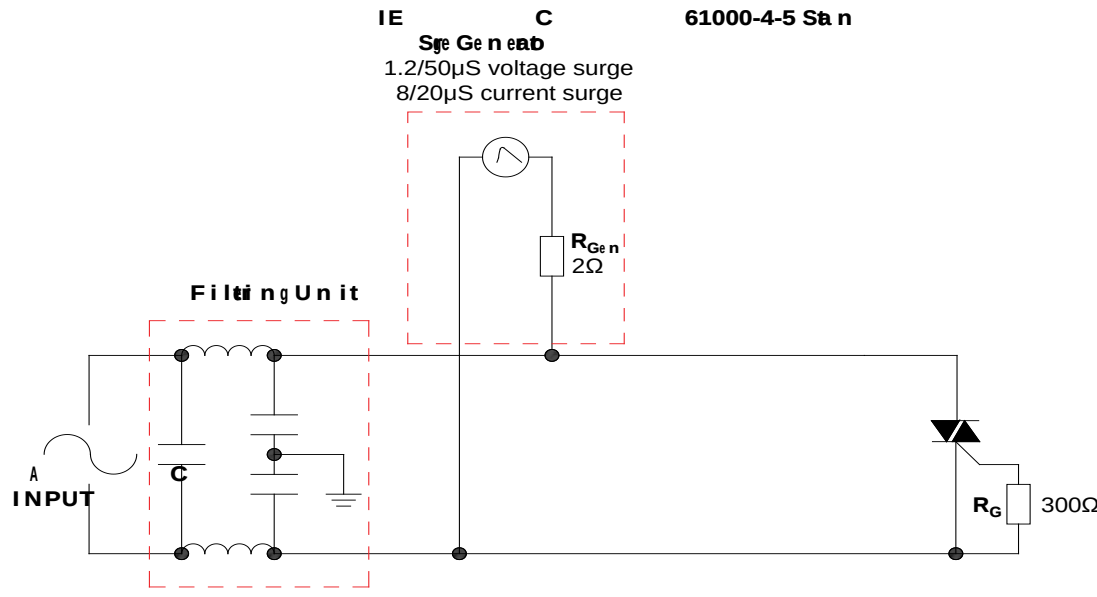

LEAD FORMING AND SOLDERING

Refer to application note
by JieJieMicroelectronics

hde Package s

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST41SJ-600BW	600	50	TO-247J	30	Tube

Document Revision History

Date	Rev	Change
Apr .11, 2023	A. 1	

PACKAGE MECHANICAL DATA



Ref.	Dim					
	Millimetr			Inche		
	Min.	Ty	Max	Min.	Ty	Max
A						
	B		1			
	C					
D						
E						
F						
G						

H
J
K
L

<http://www.jjwdz.com>