



# JMT280KT16T3

Parameter


	Conditions	Symbol	Values	Unit
Repetitive peak offstate voltage	$T_{vj} = 25^{\circ}\text{C}$	$V_{\text{DRM}}$	1600	V
Repetitive peak reverse voltage	$T_{vj} = 25^{\circ}\text{C}$	$V_{\text{RRM}}$	1600	V
Non-repetitive peak offstate voltage	$T_{vj} = 25^{\circ}\text{C}$	$V_{\text{DSM}}$	1700	V
Non-repetitive peak reverse voltage	$T_{vj} = 25^{\circ}\text{C}$	$V_{\text{RSM}}$	1700	V





JM

Circuit Diagram

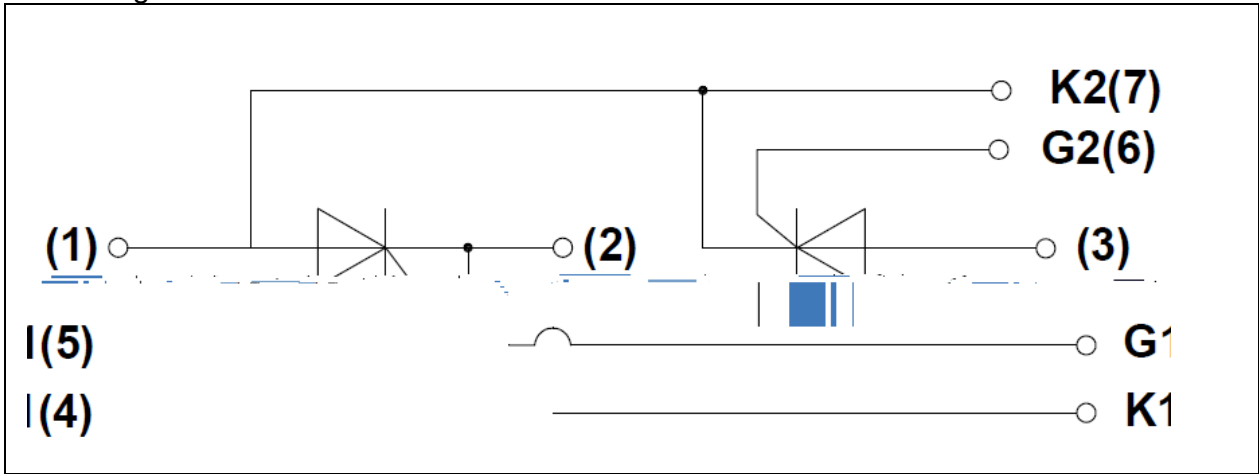

Package Outlines (mm)



Package Outlines (mm)

